



1. SELECT THE THREAD YOU NEED

2. SELECT THE ANODE LENGTH


NPT	Thread reference	UNC	Thread reference	ISO	Thread reference	BSPT	Thread reference	Anode reference	S	Length	Anode reference	M	Length	Anode reference	L	Length	Anode reference	XL	Length
1/8	EA-COM-NPT-18	5/16	EA-COM-UNC-516	M10	EA-COM-ISO-M10	1/8	EA-COM-BSPT-18	ZN-S	13 mm	0,51 in	ZN-M	26 mm	1,02 in	ZN-L	39 mm	1,53 in	ZN-XL	52 mm	2,05 in
		3/8	EA-COM-UNC-38																
1/4	EA-COM-NPT-14	1/2	EA-COM-UNC-12	M12	EA-COM-ISO-M12	1/4	EA-COM-BSPT-14	ZN-S	13 mm	0,51 in	ZN-M	26 mm	1,02 in	ZN-L	39 mm	1,53 in	ZN-XL	52 mm	2,05 in
		9/16	EA-COM-UNC-916	M14	EA-COM-ISO-M14														
3/8	EA-COM-NPT-38	5/8	EA-COM-UNC-58	M16	EA-COM-ISO-M16	3/8	EA-COM-BSPT-38	ZN-S	15 mm	0,59 in	ZN-M	30 mm	1,18 in	ZN-L	45 mm	1,77 in	ZN-XL	60 mm	2,36 in
		3/4	EA-COM-UNC-34	M18	EA-COM-ISO-M18														
1/2	EA-COM-NPT-12	7/8	EA-COM-UNC-78	M20	EA-COM-ISO-M20	1/2	EA-COM-BSPT-12	ZN-S	17 mm	0,67 in	ZN-M	34 mm	1,34 in	ZN-L	51 mm	2,01 in	ZN-XL	68 mm	2,68 in
		1 1/8	EA-COM-UNC-118	M22	EA-COM-ISO-M22														
3/4	EA-COM-NPT-34	1 1/4	EA-COM-UNC-114	M24	EA-COM-ISO-M24	3/4	EA-COM-BSPT-34	ZN-S	20 mm	0,79 in	ZN-M	40 mm	1,57 in	ZN-L	60 mm	2,36 in	ZN-XL	80 mm	3,15 in
		M27	EA-COM-ISO-M27																
1	EA-COM-NPT-1	1 1/2	EA-COM-UNC-112	M30	EA-COM-ISO-M30	1	EA-COM-BSPT-1	ZN-S	15 mm	0,59 in	ZN-M	30 mm	1,18 in	ZN-L	50 mm	1,97 in	ZN-XL	60 mm	2,36 in
		M33	EA-COM-ISO-M33																
1 1/4	EA-COM-NPT-114	1 3/4	EA-COM-UNC-134	M36	EA-COM-ISO-M36	1 1/4	EA-COM-BSPT-114	ZN-S	15 mm	0,59 in	ZN-M	30 mm	1,18 in	ZN-L	50 mm	1,97 in	ZN-XL	60 mm	2,36 in
		M42	EA-COM-ISO-M42																
1 1/2	EA-COM-NPT-112	2	EA-COM-UNC-2	M48	EA-COM-ISO-M48	1 1/2	EA-COM-BSPT-112	ZN-S	50 mm	1,97 in	ZN-M	100 mm	3,94 in	ZN-L	150 mm	5,90 in	ZN-XL	200 mm	7,87 in
		M48	EA-COM-ISO-M48																
2	EA-COM-NPT-2	2 1/4	EA-COM-UNC-214	2	EA-COM-BSPT-2	2	EA-COM-BSPT-2	ZN-S	50 mm	1,97 in	ZN-M	100 mm	3,94 in	ZN-L	150 mm	5,90 in	ZN-XL	200 mm	7,87 in
		2 1/2	EA-COM-UNC-212																
2 1/2	EA-COM-NPT-212	2 3/4	EA-COM-UNC-234	2 1/2	EA-COM-BSPT-212	2 1/2	EA-COM-BSPT-212	ZN-S	50 mm	1,97 in	ZN-M	100 mm	3,94 in	ZN-L	150 mm	5,90 in	ZN-XL	200 mm	7,87 in
		3	EA-COM-UNC-3																
3	EA-COM-NPT-3	3 1/4	EA-COM-UNC-314	3	EA-COM-BSPT-3	3	EA-COM-BSPT-3	ZN-S	50 mm	1,97 in	ZN-M	100 mm	3,94 in	ZN-L	150 mm	5,90 in	ZN-XL	200 mm	7,87 in
		3 1/2	EA-COM-UNC-312																

3. DO YOU NEED MORE HELP?


HOW DO I CREATE MY REFERENCE?

THREAD REFERENCE (1) + ANODE REFERENCE (2)
 FOR EXAMPLE; (EA-COM-NPT-14)+(ZN-S)=EA-COM-NPT-14-ZN-S


THREAD IDENTIFICATION



USE LONGER OR SHORTER ANODE THAN YOURS IF NECESSARY
 IF THE LENGTH DOES NOT MATCH CHOOSE THE NEAREST SIZE THAT CAN BE USED

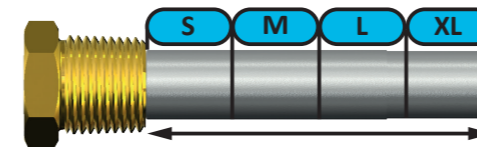

CUT ANODE IN CUTTING AREA IF NECESSARY

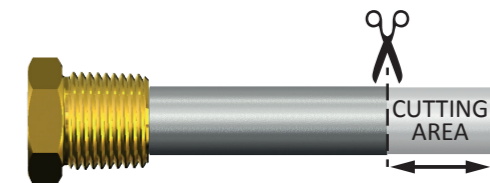

CUSTOM ANODES:
WWW.EASYANODE.COM

INSTALLATION INSTRUCTIONS
 MORE INFORMATION
WWW.EASYANODE.COM

